
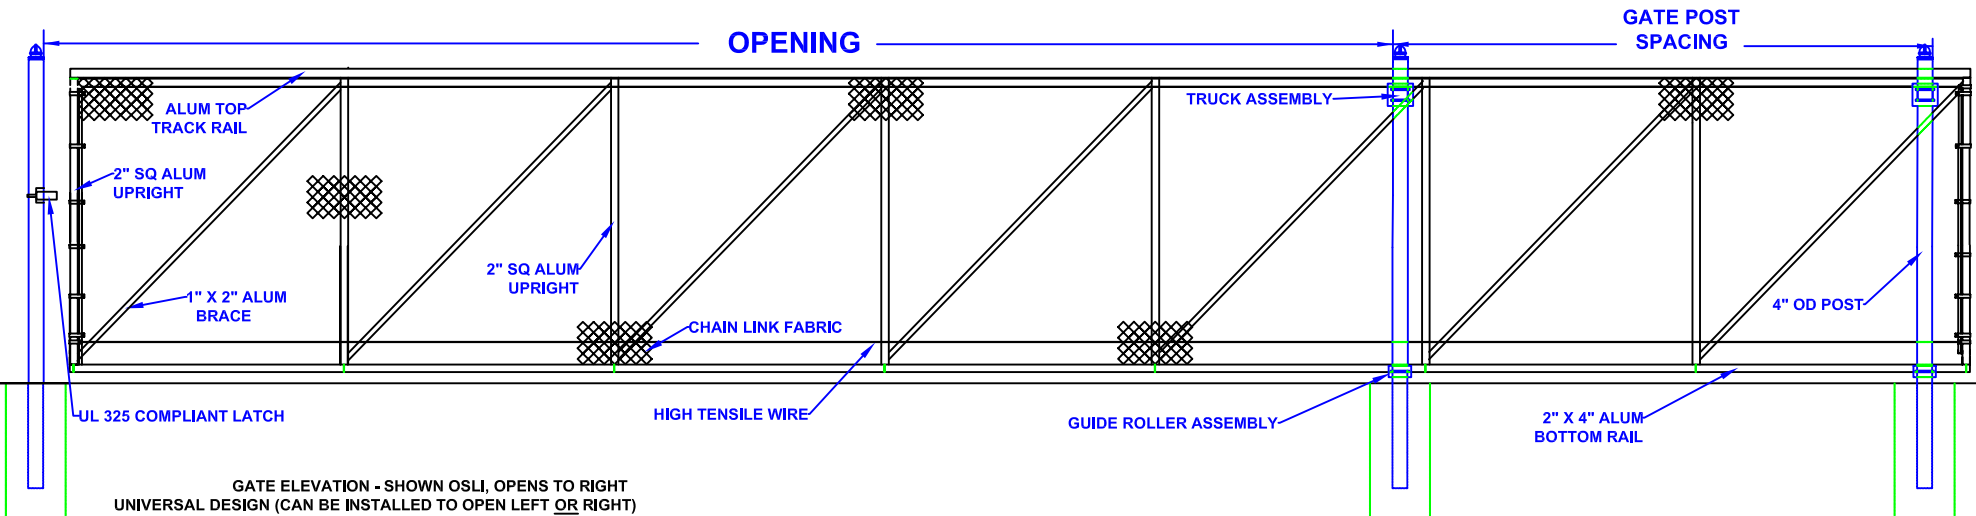


# 27' - 30' X 7' HIGH ALUMINUM SLIDE GATE (ASG-307)

GATE PART #

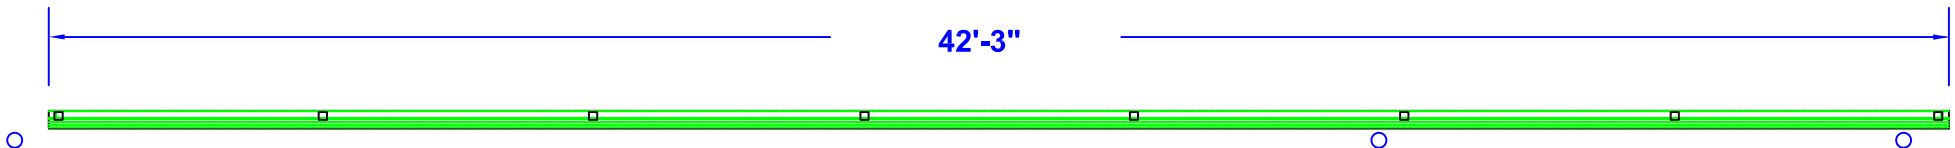

GATE ELEVATION - SHOWN OSLI, OPENS TO RIGHT  
UNIVERSAL DESIGN (CAN BE INSTALLED TO OPEN LEFT OR RIGHT)

- Notes:
1. SPECIFICATIONS CAN BE CHANGED BY SHARON FENCE COMPANY ONLY.
  2. FOOTING TO BE (4)X POST WIDTH. MIN DEPTH TO BE 36" [914 MM].
  3. GATES MAY BE MANUALLY OR ELECTRICALLY OPERATED. HARDWARE WILL VARY.
  4. GATES TABULATED ARE UL-325 COMPLIANT.
  5. GATES ARE UNIVERSAL (OPEN TO LEFT OR RIGHT).
  6. TOP TRACK AND RAIL: ENCLOSED 1-PC ALUMINUM (6061-T6) EXTRUSION (3.83 LBS PER LF) REINFORCED BY WELDING AN ADDITIONAL 2" SQ. ALUMINUM LATERAL SUPPORT RAIL.
  7. 1" X 2" ALUMINUM DIAGONAL BRACING WELDED TO 2" SQUARE ALUMINUM UPRIGHTS.

OPENING	GATE POST SPACING
27'	15'-0"
28'	14'-0"
29'	13'-0"
30'	12'-0"

Approved By: \_\_\_\_\_  
Date: \_\_\_\_\_